

PROTECTION FOR IMPORT AND EXPORT


54 GAMAL ABD ELNASER ST . VICTORIA – ALEXANDRIA – EGYPT



PRO PSS 1

Automatic Sealing Shrink Packing Machine

ITEM NO.	DESCRIPTION	PHOTOS	PACKING	TOTAL PKGS VOLUME	Remarks
PRO PSS 1	Automatic Sealing Shrink Packing Machine		Export Standard Wooden Case	6.02CBM	1. Suitable Packing Materials: POF(polyolefin) center folded roll film 2. Includes special pneumatic conveying device for packing small products 3. Certification: CE

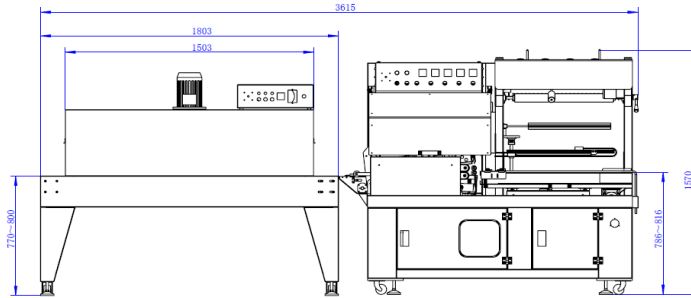

Technical Parameters

Model	FLB-4555A Automatic Sealing Cutting Machine	RS-4520P Automatic Shrinking Machine
Voltage	220V/50HZ	3PH, 380V
Power Supply	1.8KW	15KW
Air requirement	4.5-6kg/cm ²	
Net Weight	420KG	270KG
Max. Package Height	≤130mm	L1200*W350*H160mm
Max. Package Length	product length+product height+ product height* 1/2 < 550mm	
Max. Package Width	product width+product height+ product height*1/2 < 450mm	
Sealing Cutter Size	W450*L550(mm)	
Furnace Size(L*W*H)		L1500*W450*H200mm
Packing Speed	20-35 packs/minute	0-15 m/min


Item	Description	Brand/Origin
Power, Switch, Light	Power	1ϕ 220V/50HZ
	Buttons, Switches, Lights	Schneider
Sealing Cutter	Sealing Cutter	The surface plating imported Teflon
Machine Body	Steel plate sheet metal: using "BX steel" cold plate after bending surface spray processing	
	Stainless steel sheet metal: the key parts are made of 304 stainless steel	
Control System	PLC	Mitsubishi
	Time Relay	Omron
	Intermediate Relay	Omron
	Optoelectronic Switch	Panasonic
	Proximity Switch	From Taiwan
Conveyor	Motor	Liming
	Conveyor Belt	From Taiwan
	Drawing Film Belt	From Japan
Heating	Temperature Controller	Omron
	Solid-state Relay	Fotek
	Heating Tube	From Taiwan
Pneumatic	Air Cylinder	AirTac
	Pneumatic Components	AirTac




Automatic Sealing Machine Control Board




Automatic Shrinking Machine Control Board

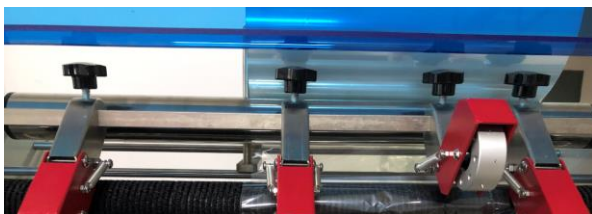

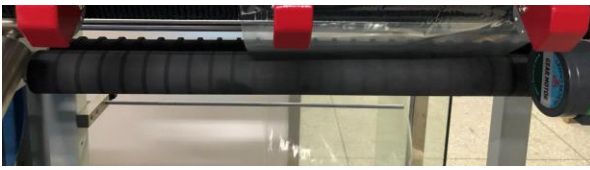

Ajustable punch pin wheels and durable fiber axis

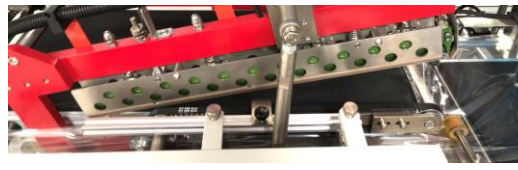

Stable operation and non-deformation Teflon sealing cutter



Panasonic photoelectric switches



Shrinking machine uses threaded stainless steel heating tube for more durable